

AYOBA

AYOBA

INDUSTRIAL AND MINING EQUIPMENT

COMPANY PROFILE

VAT: 4530255050

Co Reg: 2005/029965/07

BEE LEVEL THREE

Johannesburg

Zelda Taylor 082-449-7734

Tel: 011-869-9344

Fax: 011-8698543

Secunda

Kobus Bezuidenhout-082-493-5360

Tel: 017-632-1208

Fax: 017-632-4631

PO. Box 1842 Alberton 1450

Directors: Z Taylor & JJA Bezuidenhout



MISSION STATEMENT

To be recognized by our customers as the most sought after sourcing partner of industrial products and services

INTRODUCTION

AYOBA INDUSTRIAL & MINING EQUIPMENT, is a company which puts safety first. We are an approved supplier of hydraulic tools and accessories (ENERPAC) as well as Ingersoll-Rand Pneumatic tools and all mining and industrial equipment. We supply SAFETY equipment of any nature.

The management of AYOBA collectively have in excess of 40 years' experience in the markets we serve. AYOBA can comfortably supply repair and maintain most of your mechanical, pneumatic and hydraulic equipment.

AYOBA, while newly established company, has from the first month of trading, successfully supplied, repaired and serviced equipment to major companies, on time every time at the most competitive price and the best service.

AYOBA boasts a level 3 status with regard to BBEEE.

AYOBA has grown exponentially since it's inception and has established a (NOSA accredited) workshop and offices in Secunda which currently employs admin and technical staff. The workshop does Hydraulic, Pneumatic and mechanical repairs and service to equipment supplied through ourselves to our clients as well at the existing equipment of our clients.

AYOBA, services all the MAJOR industrial, petrochemical and mining Industries.



Our Commitment

Ayoba makes a special service commitment to exceed customers' expectations in all areas of business. Our commitment is based on the following quality pledges:

- Building long term relationships with all our clients
- Providing the best solution to address the customer's requirements
- Exceeding the customer's expectation in all areas of business
- Performing ethical and transparent practices in all business activities
- Adhere to safety standards
- Promoting only reputable brands
- Responding to enquiries within 24 hours
- Delivering our services within shortest time possible
- Continuously improvement of our processes and systems to meet internal and external requirements
- Developing & training our staff to meet their business challenges
- Building a loyal Ayoba team, and
- Embracing diversity & treat individuals with respect & dignity.
-

OUR PRODUCTS:




PUMPS & PNEUMATIC EQUIPMENT



- **WILDEN DIAPHRAGM PUMPS SPARES & ACCESSORIES**
- **REPAIR, SERVICE AND MAINTAIN ALL OF THE ABOVE**



AIR TOOLS & PNEUMATIC EQUIPMENT

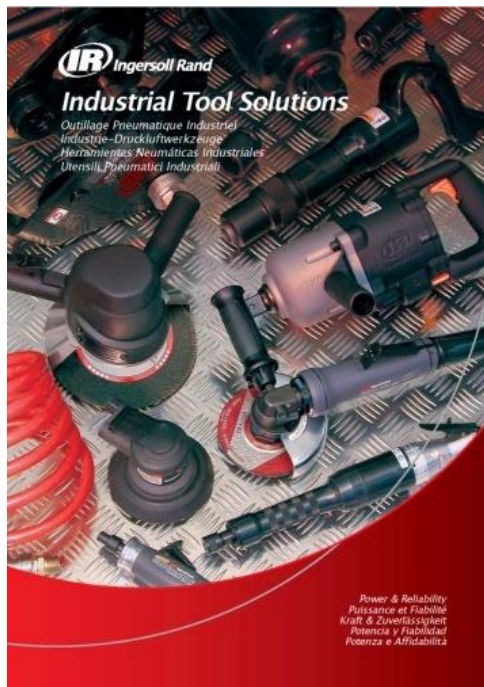

- PNEUMATIC TOOLS – IMPACT WRENCHES, GRINDERS, DRILLS, RAMMERS, JACK HAMMERS, AIR LEGS ETC.
- PNEUMATIC HOSES, FITTINGS, LINE LUBRICATORS AND ACCESSORIES
- AIR COMPRESSORS, RECEIVERS AND AIR TREATMENT EQUIPMENT.
- PNEUMATIC LUBRICATION PRODUCTS.
- REPAIR, SERVICE AND MAINTAIN ALL OF THE ABOVE



MINING AND INDUSTRIAL


MAXIMATOR®



HIGH PRESSURE TECHNOLOGY • HYDRAULICS • PNEUMATICS • TESTING EQUIPMENT

MAXIFLOW PRESSURE TECHNOLOGIES (PTY) LTD.

- ALL TYPES HOSES FITTINGS AND ACCESSORIES.
- MINING LIGHTS
- PPE
- TORCHES
- PUMPS - DIAPHRAGM
- PUMPS - SUBMERSABLE
- VALVES
- LUBRICATION
- TAMPING DEVICES

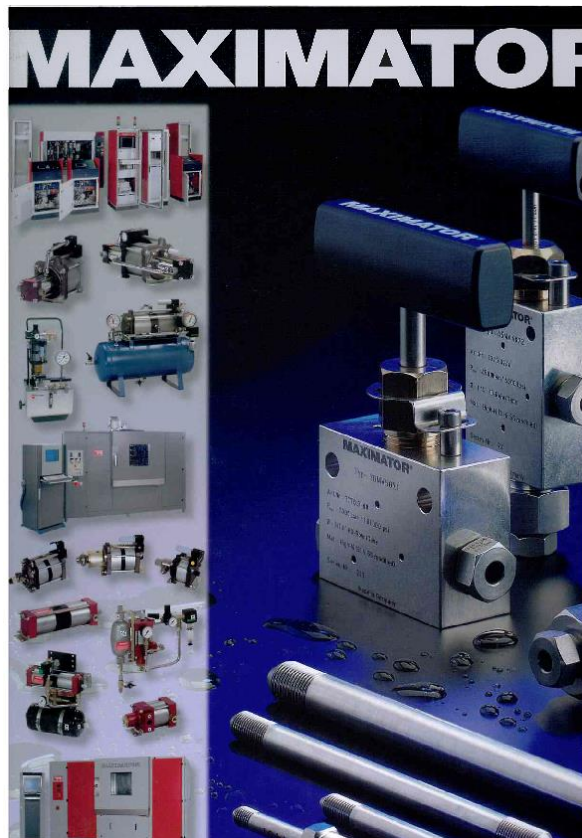

AYOBA



HYDRAULIC TORQUE TOOLS





HYDRAULIC EQUIPMENT









- HYDRAULIC HAND AND ELECTRIC POWER PACKS.
- LIFTING AND WORKHOLDING CYLINDER JACKS.
- HYDRAULIC HOSES, FITTINGS AND ACCESSORIES
- HYDRAULIC BOLTING EQUIPMENT & TORQUE TOOLS
- MAINTENANCE AND SERVICE OF ALL HYDRAULIC EQUIPMENT





INDUSTRIAL HAND AND HYDRAULIC TOOLS:

Torque Screwdrivers, Torque Wrenches, Multipliers & Calibration Tools

 <p>Torque Wrenches More »</p>	 <p>Torque Screwdrivers More »</p>
 <p>Hand Torque Multipliers More »</p>	 <p>Powered Torque Multipliers More »</p>
 <p>Torque Measurement More »</p>	 <p>Ultrasonic Bolt Measurement More »</p>
 <p>Calibration Equipment More »</p>	 <p>Engineer to Order More »</p>

- **HITACHI ELECTRICAL TOOLS AND ACCESSORIES**
- **ALL HAND TOOLS AND ACCESSORIES**
- **SOCKETS, SPANNERS, SCREWDRIVERS ETC.**
- **MOBI JACK LIFTING EQUIPMENT**
- **WELDING EQUIPMENT AND ACCESSORIES**
- **ELECTRICAL ACCESSORIES**
- **MEASUREING EQUIPMENT**
- **STANLEY PRODUCTS**
- **PADLOCKS – TRI CIRCLE PRODUCT RANGE**
- **RACO TOOLS**
- **PROTOOL PRODUCTS**
- **SPANJAARD PRODUCTS**

LIFTING EQUIPMENT






• Electric / Manual hoists & winches



MLK and HLK Series Air Chain Hoist

1/4 – 6 metric ton Lifting Capacity

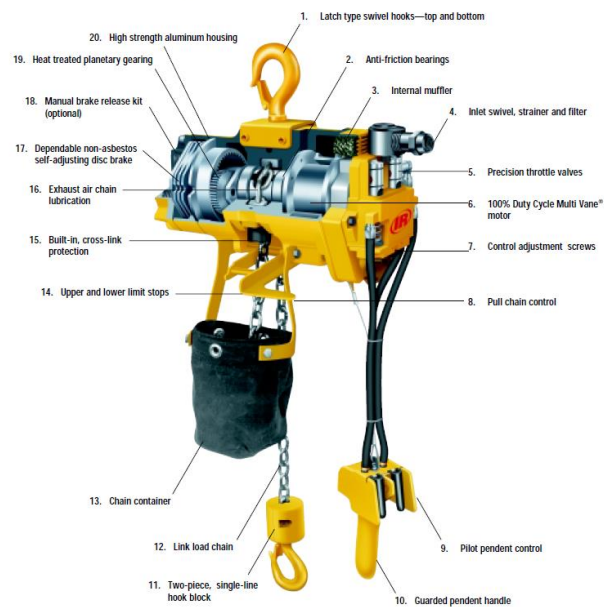

- CHAIN BLOCKS
- LEVER HOISTS
- ELECTRIC AND AIR HOISTS
- TURFORS
- WINCHES
- SLINGS AND ACCESSORIES (SHACKELS, HAMMER LOCKS ETC.)
- FALL ARREST HARNESES
- REPAIR SERVICE, LOAD TEST AND CERTIFICATION OF ALL OF THE ABOVE



SWAGEFAST – STUDBOLT SYSTEMS



Standard Swagebolt Pins & Collars



Blind Rivet Swagebolt



Flush Break Multi Fastener



Flush Break Mono Fastener



Flush Break Maxi Fasteners



Bodytainer Fasteners



Standard Fasteners (Nuts, Bolts & Washers)






SAFETY EQUIPMENT:



- PPE
- FIRE
- ARC PROTECTION
- FALL ARREST HARNESSSES & BELTS
- MINE EQUIPMENT
- WATER SAFETY
- PROTECTIVE CLOTHING
- SPILLAGE KITS
- MEDICAL EQUIPMENT
- HOSPITAL EQUIPMENT
- SECURITY EQUIPMENT
- RIOT EQUIPMENT
- SAFETY SIGNS

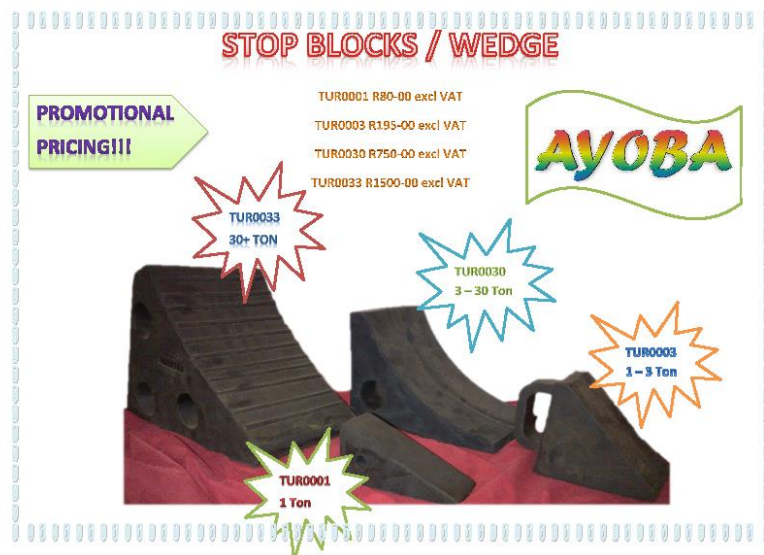



JETT WRAP – MAINTENANCE PRODUCTS

- QUICK STEEL
- THERMO STEEL
- PIPE REPAIR PRODUCTS

JETT-WRAP TECHNICAL DATA

COMBUSTION PRODUCTS	A	B
Carbon Monoxide	0.001-0.002	0.001-0.002
Carbon Dioxide	4.15	20.0-25.0
Hydrogen	0.1	0.1-0.5
Hydrocarbons	0.1	0.1
Hydrogen Cyanide	0.1	0.1
Hydrogen Sulfide	0.1	0.1
Ammonia	0.1	0.1
Hydrogen Chloride	0.1	0.1

Values are typical of average
A = with average 17.5% + with 17.5% deficiency

CURING TIME	Setting Time
1 to 2 hours	1 to 2 hours
2 to 4 hours	2 to 4 hours
4 to 8 hours	4 to 8 hours
8 to 16 hours	8 to 16 hours
16 to 24 hours	16 to 24 hours
24 to 32 hours	24 to 32 hours
32 to 40 hours	32 to 40 hours
40 to 48 hours	40 to 48 hours
48 to 56 hours	48 to 56 hours
56 to 64 hours	56 to 64 hours
64 to 72 hours	64 to 72 hours
72 to 80 hours	72 to 80 hours
80 to 88 hours	80 to 88 hours
88 to 96 hours	88 to 96 hours
96 to 104 hours	96 to 104 hours
104 to 112 hours	104 to 112 hours
112 to 120 hours	112 to 120 hours
120 to 128 hours	120 to 128 hours
128 to 136 hours	128 to 136 hours
136 to 144 hours	136 to 144 hours
144 to 152 hours	144 to 152 hours
152 to 160 hours	152 to 160 hours
160 to 168 hours	160 to 168 hours
168 to 176 hours	168 to 176 hours
176 to 184 hours	176 to 184 hours
184 to 192 hours	184 to 192 hours
192 to 200 hours	192 to 200 hours
200 to 208 hours	200 to 208 hours
208 to 216 hours	208 to 216 hours
216 to 224 hours	216 to 224 hours
224 to 232 hours	224 to 232 hours
232 to 240 hours	232 to 240 hours
240 to 248 hours	240 to 248 hours
248 to 256 hours	248 to 256 hours
256 to 264 hours	256 to 264 hours
264 to 272 hours	264 to 272 hours
272 to 280 hours	272 to 280 hours
280 to 288 hours	280 to 288 hours
288 to 296 hours	288 to 296 hours
296 to 304 hours	296 to 304 hours
304 to 312 hours	304 to 312 hours
312 to 320 hours	312 to 320 hours
320 to 328 hours	320 to 328 hours
328 to 336 hours	328 to 336 hours
336 to 344 hours	336 to 344 hours
344 to 352 hours	344 to 352 hours
352 to 360 hours	352 to 360 hours
360 to 368 hours	360 to 368 hours
368 to 376 hours	368 to 376 hours
376 to 384 hours	376 to 384 hours
384 to 392 hours	384 to 392 hours
392 to 400 hours	392 to 400 hours
400 to 408 hours	400 to 408 hours
408 to 416 hours	408 to 416 hours
416 to 424 hours	416 to 424 hours
424 to 432 hours	424 to 432 hours
432 to 440 hours	432 to 440 hours
440 to 448 hours	440 to 448 hours
448 to 456 hours	448 to 456 hours
456 to 464 hours	456 to 464 hours
464 to 472 hours	464 to 472 hours
472 to 480 hours	472 to 480 hours
480 to 488 hours	480 to 488 hours
488 to 496 hours	488 to 496 hours
496 to 504 hours	496 to 504 hours
504 to 512 hours	504 to 512 hours
512 to 520 hours	512 to 520 hours
520 to 528 hours	520 to 528 hours
528 to 536 hours	528 to 536 hours
536 to 544 hours	536 to 544 hours
544 to 552 hours	544 to 552 hours
552 to 560 hours	552 to 560 hours
560 to 568 hours	560 to 568 hours
568 to 576 hours	568 to 576 hours
576 to 584 hours	576 to 584 hours
584 to 592 hours	584 to 592 hours
592 to 600 hours	592 to 600 hours
600 to 608 hours	600 to 608 hours
608 to 616 hours	608 to 616 hours
616 to 624 hours	616 to 624 hours
624 to 632 hours	624 to 632 hours
632 to 640 hours	632 to 640 hours
640 to 648 hours	640 to 648 hours
648 to 656 hours	648 to 656 hours
656 to 664 hours	656 to 664 hours
664 to 672 hours	664 to 672 hours
672 to 680 hours	672 to 680 hours
680 to 688 hours	680 to 688 hours
688 to 696 hours	688 to 696 hours
696 to 704 hours	696 to 704 hours
704 to 712 hours	704 to 712 hours
712 to 720 hours	712 to 720 hours
720 to 728 hours	720 to 728 hours
728 to 736 hours	728 to 736 hours
736 to 744 hours	736 to 744 hours
744 to 752 hours	744 to 752 hours
752 to 760 hours	752 to 760 hours
760 to 768 hours	760 to 768 hours
768 to 776 hours	768 to 776 hours
776 to 784 hours	776 to 784 hours
784 to 792 hours	784 to 792 hours
792 to 800 hours	792 to 800 hours
800 to 808 hours	800 to 808 hours
808 to 816 hours	808 to 816 hours
816 to 824 hours	816 to 824 hours
824 to 832 hours	824 to 832 hours
832 to 840 hours	832 to 840 hours
840 to 848 hours	840 to 848 hours
848 to 856 hours	848 to 856 hours
856 to 864 hours	856 to 864 hours
864 to 872 hours	864 to 872 hours
872 to 880 hours	872 to 880 hours
880 to 888 hours	880 to 888 hours
888 to 896 hours	888 to 896 hours
896 to 904 hours	896 to 904 hours
904 to 912 hours	904 to 912 hours
912 to 920 hours	912 to 920 hours
920 to 928 hours	920 to 928 hours
928 to 936 hours	928 to 936 hours
936 to 944 hours	936 to 944 hours
944 to 952 hours	944 to 952 hours
952 to 960 hours	952 to 960 hours
960 to 968 hours	960 to 968 hours
968 to 976 hours	968 to 976 hours
976 to 984 hours	976 to 984 hours
984 to 992 hours	984 to 992 hours
992 to 1000 hours	992 to 1000 hours

TENSILE STRENGTH: 20000 psi

syntho-glass SA cc

INDUSTRIAL SOLUTIONS

ThermoSteel

ThermoSteel is a cold weld paste, which is used for the repair of cracks, holes and leaks. Applications include industrial systems, storage tanks, and piping. ThermoSteel is applied by brush or spray. ThermoSteel is cured by heat, or by the use of a heat gun.

QuickSteel

QUICKSTEEL is a cold weld paste, which is used for the repair of cracks, holes and leaks. Applications include industrial systems, storage tanks, and piping. QuickSteel is applied by brush or spray. QuickSteel is cured by heat, or by the use of a heat gun.

Seal-Up

SEAL-UP is a cold weld paste, which is used for the repair of cracks, holes and leaks. Applications include industrial systems, storage tanks, and piping. SEAL-UP is applied by brush or spray. SEAL-UP is cured by heat, or by the use of a heat gun.

BOND-IT

BOND-IT is a cold weld paste, which is used for the repair of cracks, holes and leaks. Applications include industrial systems, storage tanks, and piping. BOND-IT is applied by brush or spray. BOND-IT is cured by heat, or by the use of a heat gun.

ST STREET

ST STREET is a cold weld paste, which is used for the repair of cracks, holes and leaks. Applications include industrial systems, storage tanks, and piping. ST STREET is applied by brush or spray. ST STREET is cured by heat, or by the use of a heat gun.

BIO-GLASS

BIO-GLASS is a cold weld paste, which is used for the repair of cracks, holes and leaks. Applications include industrial systems, storage tanks, and piping. BIO-GLASS is applied by brush or spray. BIO-GLASS is cured by heat, or by the use of a heat gun.

WE CARRY A LARGE NUMBER OF BRANDS AND GENERIC PRODUCTS ALIKE.

MANUFACTURED FOR AND IMPORTED BY: **syntho-glass SA cc**

DISTRIBUTED BY:

syntho-glass SA cc

FAST RELIABLE PIPE REPAIR

LEAKING PIPE?

QUICK ACTION REPAIR FOR CRACKED OR BROKEN PIPES

READY TO USE NO MIXING NO MESS SETS IN MINUTES HEAT RESISTANT

6 EASY STEPS TO FOLLOW

1. Release any pressure in pipe. Clean and roughen area to be repaired.
2. Apply **Bute Pac** vinyl patch to the damaged area.
3. Only open foil pack immediately before use, as resin starts curing with the moisture present in the air.
4. Using gloves, immerse enclosed bandage in water for between 20-30 seconds, ensuring that the inner layers are completely soaked.
5. Apply **Jett Wrap** starting 24-40mm on one side of the patch and working towards the same distance on the other side. Pull bandage firmly after each wind and work the resin into the cloth as well. Gradually work to centre where the 8 wraps are required over the patch.
6. **Jett Wrap** will be cured within 30 minutes and pipeline can resume operation.

Jett-Wrap is suitable for Metal, HDPE, Asbestos, Rubber, Plastics and PVC Piping

syntho-glass SA cc

JETT-WRAP

Jett-Wrap is a cold weld paste, which is used for the repair of cracks, holes and leaks. Applications include industrial systems, storage tanks, and piping. Jett-Wrap is applied by brush or spray. Jett-Wrap is cured by heat, or by the use of a heat gun.

JETT-WRAP ADVANTAGES

- Repairing damaged pipes in situ
- Suitable for Metal, HDPE, Asbestos, Rubber, Plastics and PVC piping
- Quickly and easily applied
- Safe under water
- Reduces shut down time to 30 minutes

JETT-WRAP CHARACTERISTICS

- No flammable odours
- Non combustible
- Not toxic, recommended for potable water pipe lines
- Can be removed and polished
- Not affected by gas, oil or diesel

JETT-WRAP USES:

- Damaged Pipes Repair
- Corrosion protection
- Pipes and piping reinforcement
- Coating of pipe joints
- Electrical insulation

SIZES

Product	Width	Length	Thickness (mm)	Weight (kg)
80-80	80 mm	1.5 m	0.5 mm	0.5 kg
80-10	80 mm	10 m	0.5 mm	5 kg
80-100	80 mm	100 m	0.5 mm	50 kg
80-1000	80 mm	1000 m	0.5 mm	500 kg
80-10000	80 mm	10000 m	0.5 mm	5000 kg
80-100000	80 mm	100000 m	0.5 mm	50000 kg
80-1000000	80 mm	1000000 m	0.5 mm	500000 kg
80-10000000	80 mm	10000000 m	0.5 mm	5000000 kg
80-100000000	80 mm	100000000 m	0.5 mm	50000000 kg
80-1000000000	80 mm	1000000000 m	0.5 mm	500000000 kg
80-10000000000	80 mm	10000000000 m	0.5 mm	5000000000 kg
80-100000000000	80 mm	100000000000 m	0.5 mm	50000000000 kg
80-1000000000000	80 mm	1000000000000 m	0.5 mm	500000000000 kg
80-10000000000000	80 mm	10000000000000 m	0.5 mm	5000000000000 kg
80-100000000000000	80 mm	100000000000000 m	0.5 mm	50000000000000 kg
80-1000000000000000	80 mm	1000000000000000 m	0.5 mm	500000000000000 kg
80-10000000000000000	80 mm	10000000000000000 m	0.5 mm	5000000000000000 kg
80-100000000000000000	80 mm	100000000000000000 m	0.5 mm	50000000000000000 kg
80-1000000000000000000	80 mm	1000000000000000000 m	0.5 mm	500000000000000000 kg
80-10000000000000000000	80 mm	10000000000000000000 m	0.5 mm	5000000000000000000 kg
80-100000000000000000000	80 mm	100000000000000000000 m	0.5 mm	50000000000000000000 kg
80-1000000000000000000000	80 mm	1000000000000000000000 m	0.5 mm	500000000000000000000 kg
80-10000000000000000000000	80 mm	10000000000000000000000 m	0.5 mm	5000000000000000000000 kg
80-100000000000000000000000	80 mm	100000000000000000000000 m	0.5 mm	50000000000000000000000 kg
80-1000000000000000000000000	80 mm	1000000000000000000000000 m	0.5 mm	500000000000000000000000 kg
80-10000000000000000000000000	80 mm	10000000000000000000000000 m	0.5 mm	5000000000000000000000000 kg
80-100000000000000000000000000	80 mm	100000000000000000000000000 m	0.5 mm	50000000000000000000000000 kg
80-1000000000000000000000000000	80 mm	1000000000000000000000000000 m	0.5 mm	500000000000000000000000000 kg
80-10000000000000000000000000000	80 mm	10000000000000000000000000000 m	0.5 mm	5000000000000000000000000000 kg
80-100000000000000000000000000000	80 mm	100000000000000000000000000000 m	0.5 mm	50000000000000000000000000000 kg
80-1000000000000000000000000000000	80 mm	1000000000000000000000000000000 m	0.5 mm	500000000000000000000000000000 kg
80-10000000000000000000000000000000	80 mm	10000000000000000000000000000000 m	0.5 mm	5000000000000000000000000000000 kg
80-100000000000000000000000000000000	80 mm	100000000000000000000000000000000 m	0.5 mm	50000000000000000000000000000000 kg
80-1000000000000000000000000000000000	80 mm	1000000000000000000000000000000000 m	0.5 mm	500000000000000000000000000000000 kg
80-10000000000000000000000000000000000	80 mm	10000000000000000000000000000000000 m	0.5 mm	5000000000000000000000000000000000 kg
80-100000000000000000000000000000000000	80 mm	100000000000000000000000000000000000 m	0.5 mm	50000000000000000000000000000000000 kg
80-1000000000000000000000000000000000000	80 mm	1000000000000000000000000000000000000 m	0.5 mm	500000000000000000000000000000000000 kg
80-10000000000000000000000000000000000000	80 mm	10000000000000000000000000000000000000 m	0.5 mm	5000000000000000000000000000000000000 kg
80-100000000000000000000000000000000000000	80 mm	100000000000000000000000000000000000000 m	0.5 mm	50000000000000000000000000000000000000 kg
80-1000000000000000000000000000000000000000	80 mm	1000000000000000000000000000000000000000 m	0.5 mm	500000000000000000000000000000000000000 kg
80-100	80 mm	100 m	0.5 mm	5000000000000000000000000000000000000000 kg
80-1000	80 mm	1000 m	0.5 mm	500 kg
80-100	80 mm	100 m	0.5 mm	5000 kg
80-1000	80 mm	1000 m	0.5 mm	500 kg
80-100	80 mm	100 m	0.5 mm	5000 kg
80-1000	80 mm	1000 m	0.5 mm	500 kg
80-100	80 mm	100 m	0.5 mm	5000 kg
80-1000	80 mm	1000 m	0.5 mm	500 kg
80-100	80 mm	100 m	0.5 mm	5000 kg
80-1000	80 mm	1000 m	0.5 mm	500 kg
80-100	80 mm	100 m	0.5 mm	5000 kg
80-1000	80 mm	1000 m	0.5 mm	500 kg
80-100	80 mm	100 m	0.5 mm	5000 kg
80-1000	80 mm	1000 m		

AYOBA

FIRE STRYKER

Just one strike and the fire is out!

THIS PRODUCT WILL REVOLUTIONISE YOUR FIRE EXTINGUISHER REQUIREMENTS!



Household use:
Model 5B

Specifications:

- Emission Time: 25 Seconds
- Length: 25.4cm
- Diameter: 3.3cm
- Weight: 230 grams

The Fire Stryker is efficient

The Fire Stryker flame inhibitor is a simple and easy way to ensure that you are prepared in the event of a fire in your home, your office or your vehicle. It weighs far less than a conventional fire extinguisher and can operate for longer. And best of all, there is NO residue left behind after use.



Professional use:
Model 8B

Specifications:

- Emission Time: 50 Seconds
- Length: 25.9cm
- Diameter: 3.3cm
- Weight: 275 grams

The Fire Stryker is safe

Small and light weight, the Fire Stryker is environmentally friendly and can safely be stored for easy access in an emergency. The Fire Stryker flame inhibitor will help you to contain a fire, preventing it from becoming a threat to life or property.

Warning: Do not touch metal cylinder before and after use due to risk of burn. Keep out of reach of children. Do not point near and jabs people. The product does not extinguish live coal. Do not inhale smoke.



Industrial use:
Model 13B

Specifications:

- Emission Time: 100 Seconds
- Length: 32.8cm
- Diameter: 3.3cm
- Weight: 550 grams

The Fire Stryker is economical

No servicing, refilling, checks or maintenance. No danger from pressurized containers which can explode or malfunction. Store the Fire Stryker flame inhibitor in an easily accessible place. Point the nozzle at the base of the flames to smother the fire at its core.



Extinguishes Class A (solid combustible), Class B (liquid and gas combustible) and Class C (electrical fires on equipment up to 1000V/40kW) flames.






WE SUPPLY A FULL RANGE OF PUMPS & MECHANICAL SEALS



**WE REPAIR AND
REFURBISH ALL
MAKES OF PUMPS &
MECHANICAL SEALS
TO OEM
SPECIFICATION**

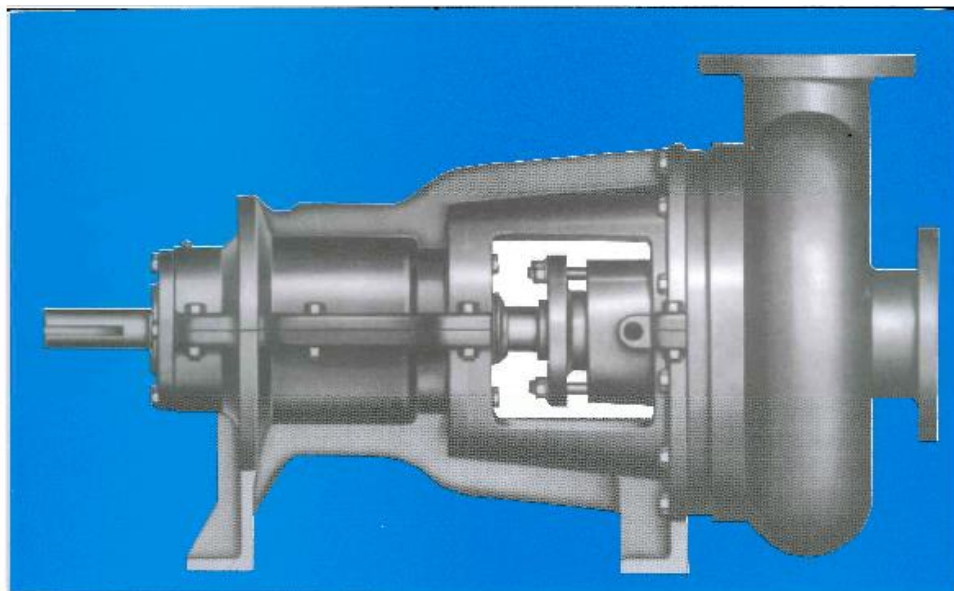



1

LETABA INDUSTRIAL PUMPS
(Division of Setpoint Industrial Technologies Pty Ltd)
Reg. No. 1989/000201/07
PO Box 3534 Edenvale 1610
15 Imvubu Road, Sebenza Ext 6
Tel: (011) 452-1351/2/3/4 Fax: (011) 452-1431

LETABA
INDUSTRIAL PUMPS

1st November 2010

AYOBA
P O Box 1842
Alberton
1450

Attention: Zelda Taylor
Kobus Bezuidenhout

Re: WILDEN Pumps for Resale

To Whom It May Concern

This letter serves to confirm the appointment of **AYOBA** as a reseller of the **WILDEN** product range in Secunda and surrounding areas. The services offered include the promotion, sales, service and repair of pumps, plus all associated spares.

Letaba Industrial Pumps (Pty) Ltd of South Africa serves as the sole Southern African importer of the **WILDEN** product range and offers its full technical and product support to **AYOBA** and their staff.

Yours sincerely

Terry Collins
Sales Manager
(For and on behalf of Letaba Industrial Pumps)
Phone (011) 452-1351/2/3/4
Fax (011) 452-1431
0 8 2 3 3 2 7 0 5 1
terryc@letabapumps.co.za



Directors: G E Nel J Vassiloudis I P Duke G J Horsfield

Directors: Z Taylor & JJA Bezuidenhout

ENERPAC

INDUSTRIAL TOOLS AFRICA
P.O. BOX 4876, HALFWAY HOUSE 1685.
SOUTH AFRICA.

Phone : (27) 12 661 0344

Fax : (27) 12 661 0796

E/Mail : enerpac@yebo.co.za



18 th January 2011

Kairan Allen
Sasol
Secunda

Dear Kairan,

Re : CONFIRMATION OF APPOINTMENT AS AN ENERPAC REPAIR AGENT.

This serves to confirm Westside Trading, T/A Ayoba Safety & Supplies have been appointed as an Enerpac Sud-Distributor for South Africa.

They are are authorized to market and repair the following products :

- a) Cylinders
- b) Pumps
- c) Hoses
- d) Valves
- e) All Maintenance Equipment in the E 326e catalogue.
- f) Torque Wrench Equipment.

In an effort to offer our customers, the endusers a better service, Enerpac will only appoint repair agents who are able to repair our products to the original factory specifications. This ensures the customers that the products repaired by our repair centres have been repaired taking Safety of the operator into account.

It is also important to advise your customers that the Enerpac Range of products carry a " Lifetime Warrantee " which will fall away immediately unless repaired and serviced by an approved repair centre.

All Enerpac Factory Appointed repair agents have been certified and issued with a certificate of compliance, which will be made available to the users should this be required.

Should you or your customers require any further information, please give me a call on 0827761571.

Thank you.

Best regards



NEIL WATSON
Territory Manager
Africa & Sub Sahara.



Ingersoll Rand SA (Pty) Ltd
Reg No. 1922/007357/07
21 Innes Road,
Michele Ferrero Business Park,
Jetpark Ext. 31
P.O. Box 14687, Witfield,
1467, South Africa
Office: +27 (0) 11 565 8600
Direct: +27 (0) 11 565 8603

Mobile: +27 (0) 83 233 9836
Fax: +27 (0) 86 674 0191
yugan_moodley@eu.irco.com

17 January 2012

Attention: **To Whom it May Concern (Sasol)**
Tel No.:
Fax. No.:
E-Mail :

Subject: **OFFICIAL INGERSOLL RAND DISTRIBUTOR**

Dear Sir/Madam,

This serves as confirmation that Westside Trading 491 (Pty) Ltd t/a Ayoba, is an Official (Sole) Distributor of Ingersoll Products, namely, Tools, Fluid and Material Handling Products.
Ayoba also represent Ingersoll Rand as an authorized Service and Parts Distributor for the said range of products.

Ayoba's authorized geographic representation of Ingersoll Rand is:

- Gauteng
- Vaal Triangle
- Mpumalanga
- North West Province

As a commitment to our valued customers, Ayoba, will subscribe to Ingersoll Rand's Code of Conduct for business Partners. A copy is attached for your records.

Assuring you of our best attention at all times.

We are,

Yours very truly,
INGERSOLL-RAND COMPANY South Africa (PROPRIETARY) LIMITED


Yugan Moodley
Regional Sales Manager - TFM
Southern Africa
EMEIA
21 Innes Road, Michele Ferrero Park, Jet Park
PO Box 14687, Witfield, 1467

Office (+27) 11 565 8600
Direct (+27) 11 565 8603 Mobile (+27) 83 233 9836
Fax 086 674 0191
Email yugan_moodley@eu.irco.com
Website www.ingersollrandproducts.com



 Please consider the environment before printing this email

Directors: F. Funke (Managing)*, P. Blinkhorn**
(*German) (**British)



Atlas Copco

ATLAS COPCO INDUSTRIAL TECHNIQUE
Innes Road
Jet Park
Witfield
Boksburg
South Africa
1467

To whom it may concern

Please note that Ayoba Industrial is a recognized distributor for Atlas Copco Tools and Assembly Systems. .

This document serves as a confirmation of distribution agreement between

ATLAS COPCO INDUSTRIAL TECHNIQUE
(Herein known as the Supplier)

And


AYOBA INDUSTRIAL
(Herein known as the Distributor)

1. This distributor will be registered to market and promote the Atlas Copco brand in this area and are the registered distributor for Gauteng, Mpumalanga and Kwazulu Natal regions.
2. The distributor is registered to distribute certain products within the Industrial Tools range which is specified.
3. The Supplier will extend to the Distributor a line of credit in the form of a 30 day account which will be subject to credit approval and our Standard Conditions of Agreement (available on request).
4. The Supplier will provide all marketing and training material as well as offer training to the Distributor's sales staff on the products to be sold as well as a price list to the Distributor.
5. The Distributor will be on a contract basis and renewed yearly upon criteria approval

We welcome you on board and look forward to a long and prosperous working relationship between ATLAS COPCO INDUSTRIAL TECHNIQUE and AYOBA INDUSTRIAL.

Should you have any questions, please do not hesitate to contact me.

Best regards
Greg Power


G.I. Business & Regional Manager

ATLAS COPCO TOOLS AND ASSEMBLY SYSTEMS
SOUTHERN AFRICA

On behalf of AYOBA INDUSTRIAL

Name : _____ (in Print Please)

Signature : _____

Signed at _____ on this day _____ of _____ 2013

Atlas Copco Tools & Assembly Systems

A Company Within the Atlas Copco Group

Atlas Copco Industrial Technique SA
P.O. Box 13555
Witfield
1467
www.atlascopco.co.za

Visitors Address:
Innes Road
Jet Park
Boksburg

Phone: +27 (0)11 437 6925
Fax: +27 (0)11 252 7077
Mobile: +27 (0)83 627 7730
E-mail: greg.power@za.atlascopco.com

